



**Chaska 34**  
GAS INSERT



*Chaska 34 shown  
with Rectangle screen  
front and optional  
ember light kit*



# Chaska 34 Specifications



Chaska 34 shown with Brushed stainless screen front and H2O liquid glass

Model	Fuel Options	High	Low	Efficiencies (steady state)
Chaska 34 (LGR)	NG	34,000	18,000	77%
	LP	34,000	18,000	77%

These three inserts (CSK-34-L, CSK-34-G & CSK-34-R) come standard with an Electronic Ignition Pilot System. The included thermostatic remote control will adjust the flame and fan speed, along with the light kit (if applicable)

## Features

- Canada P-4 Approved
- Electronic ignition pilot system
- Log set (CSK-34-L)
- Rock set (CSK-34-R)
- Co-linear air duct - Accepts 3" combustion air / 3" exhaust
- High quality lifetime glass (31-1/2" X 19-5/8") quick-latch removal
- Light kit (CSK-34-G only)
- Remote control - thermostatic (flame, fan, light kit (if applicable) adjustment)
- Fan kit - (1) 133 CFM blower
- Refractory brick lining (CSK-34-L)
- Enamel firebox lining - black (CSK-34-R)
- Enamel firebox lining (back panel curved) - black (CSK-34-G)

## Required for Installation\*

- Safety barrier screen front
- 1 piece shroud (standard size or custom size)
- Glass media kit (CSK-34-G)

## Safety

- Each unit factory tested!
- Tested by OMNI-Test Laboratories
- Complies with ANSI-Z21.88-2014 • CSA 2.33-2014 P.4.1-09 'vented gas fireplace heaters'
- U.S. & Canadian installation approved
- Sealed combustion chamber
- Removable control board with safety pilot
- Automatic pressure relief glass system
- Bedroom & mobile home approved

## Existing Fireplace Requirements

### Existing Fireplace Opening Must Be At Least:

- Height: 23-1/2"
- Front Width: 33-1/2"
- Back Width: 24-1/2"
- Depth: 16-3/8"

### Existing chimney must be at least:

#### Inside Diameter:

- Factory built solid fuel chimney: 7" min.
- Masonry chimney: 6" x 8" min.

#### Height:

- 12' min.
- 50' max.

## Vent System Approval & Requirements

These models are approved for use with the following Vent Systems only:

- Kozy Heat™ - #816 venting components
- Simpson Dura-Vent™
- Selkirk Metalbestos™
- Ameri-Vent™
- Metal Fab™
- ICC™
- Security™
- RLH™

### Vertical Termination ONLY

Minimum vent run: 12'

Maximum vent run: 50'

## Specifications





Height	23"
Width	33-3/8"
Depth	16"
Back Width	24-3/8"
Weight	150 lbs.

Refer to each model's installation manual for complete installation & venting requirements.

## Clearances

From insert to combustible floor in front	Refer to chart in manual
From insert to side wall	6"
Mantel 9" deep from top of insert*	16"
*Mantel must be a minimum of 12" from top of fireplace face. The maximum depth at this height is ¾". See additional mantel clearance configurations in the installation manual.	

Features, Options & Specifications are subject to change.

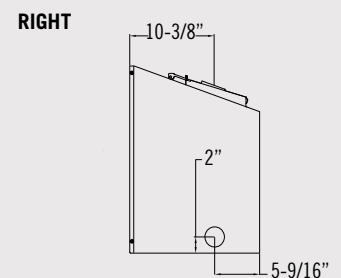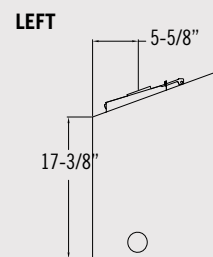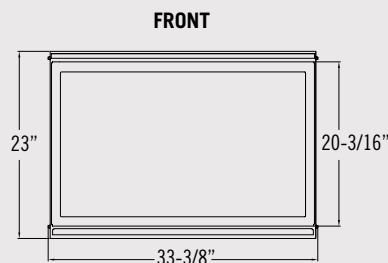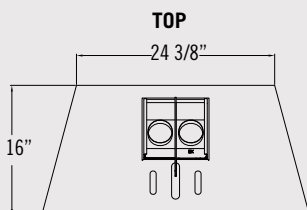

*Chaska 34 shown with Beveled screen front, rock media and optional ember light kit*



## The Chaska 34...

Transform that cold, drafty fireplace with a clean efficient *Chaska 34* gas insert from Kozy Heat. The *Chaska* gas inserts are completely air tight and are the perfect solution to your existing wood fireplace. The *Chaska* gas inserts offer a large viewing area with our most realistic flame and log pattern yet. With three versions to choose from, the *Chaska 34* insert is available with a traditional log set or contemporary looking rock or glass media models. The optional ember light kit (log and rock models) and standard accent lighting on the glass bead model not only let you operate the fireplace without heat, but add that extra touch of realism that will soon make you forget that you are not burning wood anymore!

# Fireplace Options & Accessories

**Fronts** Available finishes: Black, Titanium, Vintage Bronze, Weathered Charcoal (Rectangle and Convex screen fronts available in Brushed Stainless)

Optional Features	L	G	R
Ember Bed Light Kit	0	S	0
Enamel Firebox Lining - Black	0	S	S
Refractory Brick Lining	S	N/A	0

KEY: 0 = Optional S = Standard N/A = Not Applicable



Chaska 34 Log burn video



Rectangle screen front



Beveled screen front



Chaska 34 Rock burn video



Chaska 34 Glass burn video



Arched screen front



Arched Prairie screen front



Arched shroud with Arched Prairie screen front




Prairie screen front



Brushed Stainless Rectangle screen front



Convex screen front

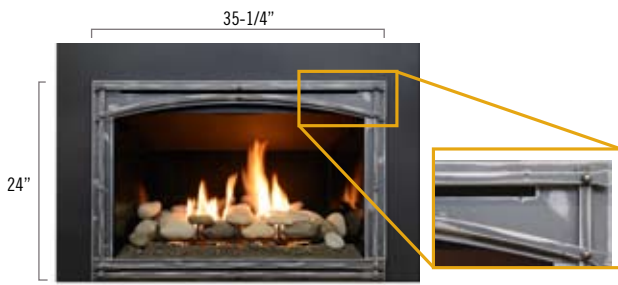

Arched Mission screen front - Weathered Charcoal



Arched Mission screen front - Vintage Bronze

## Control



Flame, lights & fan controlled by the full function remote

## Glass Media



Black



Cobalt Blue



H2O




Copper



White Frost

## Refractory Options



Traditional brick



Black enamel

In order to continually provide the highest quality product available, features/options, specifications & dimensions are subject to change. Refer to the unit installation manual for complete installation instructions. Installation must conform with local building codes. **In some regions it may be possible that this appliance qualifies for an energy rebate. See your local dealer for details regarding promotions and qualifications.**

Manufactured by Hussong Mfg. Co. Inc.  
204 Industrial Park Drive, Lakefield, MN 56150  
Phone 1-800-253-4904 www.kozyheat.com

7-14



For complete information on the Kozy Heat product line, please contact us at: